



OPEN-AREA SMOKE IMAGING DETECTION (OSID) REFERENCE GUIDE


OSID (Open-area Smoke Imaging Detector) combines dual wavelength (IR and UV) beams with CMOS imaging detection. This technology features high tolerance to vibration and structural movement and OSID differentiates better between smoke and environmental conditions than traditional beam detectors. OSID operates in both pitch dark as well as bright sunlight.

One Imager (receiver) can have up to 7 Emitters and provides easy 3D coverage for atria etc.

Fast and easy installation and commissioning is achieved through the flexible ball & socket arrangement and the use of the laser alignment tool. Trouble shooting is simple thanks to the on-board memory and the OSID Diagnostic SW package, both unique for this industry.

Below is an overview of this award winning OSID range.

OSI-10	Imager 8° FOV Distance 30-150 m with OSE-SP/W. This configuration is for a 1 on 1 system. The OSI-10 is not suited to work with High Powered Emitters.	
OSI-45	Imager 38° FOV Distance 12-60 m with OSE-SP/W Distance 24-120 m with OSE-HPW Distance 24-100 m with OSE-HP-01 The OSI-45 can operate with up to 7 Emitters.	
OSI-90	Imager 80° FOV Distance 6-34 m with OSE-SP/W Distance 12-68 m with OSE-HPW Distance 12-50 m with OSE-HP-01 The OSI-45 can operate with up to 7 Emitters.	
OSE-SP-01	Emitter battery powered-alkaline battery Using battery powered Emitters, with a guaranteed 5 year life, drastically reduce the wiring and installation costs.	
OSE-HP-01	Emitter High Power battery powered-alkaline battery Using battery powered Emitters, with a guaranteed 3 year life, drastically reduce the wiring and installation costs.	
OSE-SPW	Emitter Wired 24 Vdc A preferred solution when 24 Vdc is close by.	
OSE-HPW	Emitter High Power Wired 24 Vdc Allows to double the detection ranges of the OSI-45 and OSI- 90.	

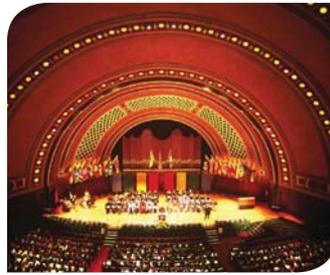

OSID-INST	OSID Installation Kit Kit including laser alignment tool, test filter, PC cable, cleaning cloth, reflectors and manual.	
VKT-301	OSID Demo kit Kit consisting of 2 X OSE-SP-01, 1 X OSI-90, 1 X OSID-INST and mounting plates, fitted in a rugged carry case.	
OSP-001	FTDI Cable 1.5m Allows to connect a PC and hence OSID Diagnostic SW to the Imager. The FTDI cable can be extended with another 20 m using cable with an active USB amplifier.	
OSP-002	Laser Alignment tool A unique alignment tool for fast alignment. Aligns and locks the eyeball. Does also activate Emitters when locked.	
OSID-WG	Wire Guard A steel cage to protect OSID Imagers and Emitters from vandalism and accidental damage.	
OSID-EHI	Imager Environmental Housing Custom designed IP 66, NEMA 4-4X protective and environmental housings protect OSID Imagers from dust and water ingress in industrial environments.	
OSID-EHE	Emitter Environmental Housing Custom designed IP 66, NEMA 4-4X protective and environmental housings protect OSID Emitters from dust and water ingress in industrial environments.	
OSE-ACF	Anti-condensation film for Emitters An easy applicable film that provide long time resistance to condensation on the acrylic Emitter lens.	
OSEH-ACF	Anti-condensation film for OSID-EH housings An easy applicable film that provide long time resistance to condensation on the glass fronts	
OSID Diagnostic Tool	Diagnostic software package A unique software program that allows visualisation of the Imager's view, quality of alignment and IR/UV real time graphs. The program also features real time logging capability for trouble shooting and site evaluation purposes.	
OSID Selection Assistant	System selection tool The program is an intuitive Excel based program that for a given area will calculate 90°, 45° and 10° OSID solutions as well offer a price comparison with traditional beams. It also gives the exact location to point the alignment laser tool for optimal FOV for the Imagers in multi-Emitter solutions.	
OSE-RBL	Emitter replacement battery Lithium	
OSE-RBA	Emitter replacement battery Alkaline	
OSI-LS	Light shield for Imagers	
OSI-RS	Imager Reset Station	




AVAILABLE FIELDS OF VIEW AND DETECTION RANGES


Image Lens Type	Usable Field of View		Detection Range				Max. Number of Emitters
	Horizontal	Vertical	Standard Power		High Power		
			Min	Max	Min	Max	
10°	7°	4°	30 m (98 ft)	150 m (492 ft)	-	-	1
45°	38°	19°	15 m (49 ft)	60 m (197 ft)	30m (98 ft)	120 m (393 ft)/ 100 m (328 ft) *	7
90°	80°	48°	6m (20 ft)	34 m (111 ft)	12m (39 ft)	68 m (223 ft)/ 50 m (164 ft) *	7

* Range with OSE-HP-01

ONE-ON-ONE APPLICATION AND THEORY OF OPERATION

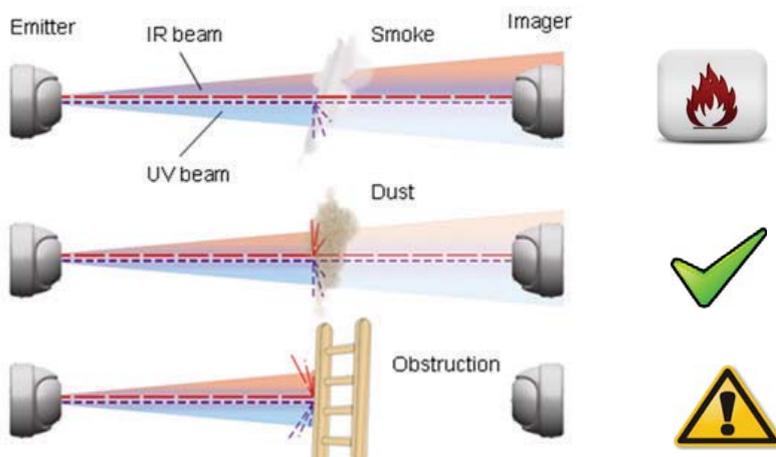

TYPICAL MULTI-EMITTER APPLICATION

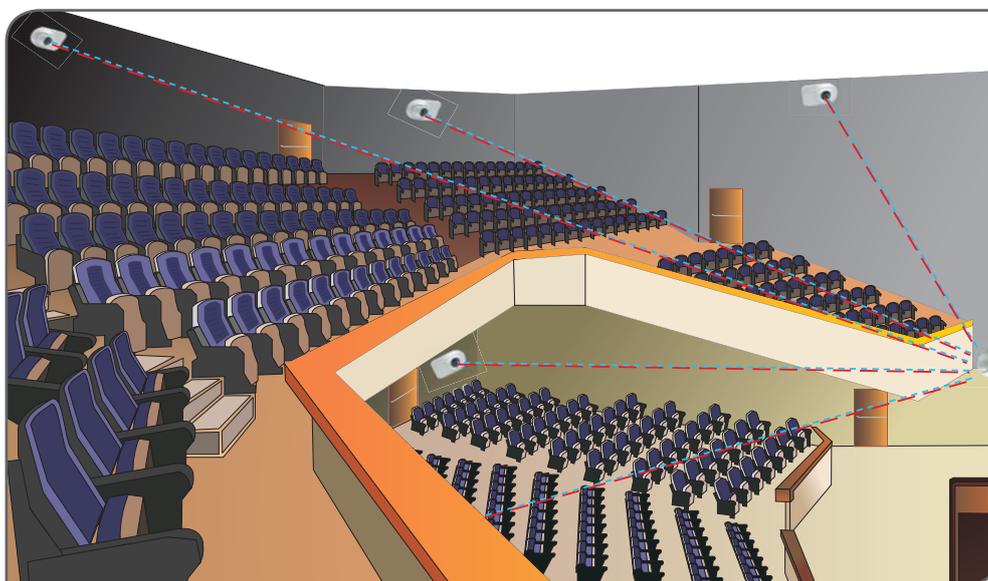



PRODUCT SPECIFICATIONS

General	
Alarm Thresholds (Configurable)	Low - Highest sensitivity / earliest alarm: 20% (0.97 dB) Medium - Medium sensitivity: 35% (1.87 dB) High - Lowest sensitivity / maximum immunity to nuisance smoke conditions: 50% (3.01 dB) Industrial mode - unapproved sensitivity at 65% (4.56 dB)
Alarm Latching (Configurable)	Latching / Non-latching configured via DIP switch
Status LEDs (Imager)	Red: Fire Alarm; Bi-color Yellow/Green: Trouble or Normal
IP Rating	IP 44 for Electronics; IP 66 for Optics Enclosure
DIP Switch Configuration (Termination Card)	Configuration for alarm thresholds, number of Emitters and alarm latching/non latching.
Electrical	
Imager Supply voltage	20-30 VDC (24 VDC nominal)
Imager Current Consumption	Typical at 24 VDC: 8 mA (one Emitter), 10 mA (seven Emitters)
Emitter Current Consumption	Externally powered Emitter (at 24 VDC): 350 µA Standard Power, 800 µA High Power Battery-powered Emitter: Built-in 5 Year Replacement Alkaline Battery, 3 Year Replacement with OSE-HP-01
Cable Gauge	0.2 - 4 mm ² (26-12 AWG)
Trouble/Fault Relay	2 A @ 30 VDC, NO-C-NC Dry Relay Contacts
Fire Alarm Relay	2 A @ 30 VDC, NO-C-NC Dry Relay Contacts
Heater Input Power	24 VDC, 16 mA (400 mW)
Environmental	
Operating Temperature	-10°C to 55°C (14°F to 131°F)
Humidity	10 to 95% RH Non-condensing
Mechanical	
Dimensions (WHD)	208 mm x 136 mm x 96 mm (8.2 in x 5.4 in x 3.8 in)
Weight	Imager: 610 g; Emitter (battery powered): 1.2 kg Emitter (wired): 535 g
Adjustment Angle	Horizontal: ±60°; Vertical: ±15°
Maximum Misalignment Angle	±2°

OSID AWARDS



OSID WEBSITE

Visit the OSID website at

www.xtralis.com

and discover application flyers, application notes, software, brochures and much more.

www.xtralis.com

UK and Europe +44 1442 242 330 D-A-CH +49 431 23284 1 The Americas +1 781 740 2223
Middle East +962 6 588 5622 Asia +86 21 5240 0077 Australia and New Zealand +61 3 9936 7000
Doc. 25598_02

