

DISCRETE HEAD


(222-059)

A non-intrusive sampling point.
for 10mm capillary pipe.

Installation Instructions:

Do not paint.
Keep pipe clean and free from dust.
Do not install in direct sunlight.
Only install with approved pipe.
Do not use solvents to clean,
only soapy water.

Part No. 222-059
Fitting colour OPAQUE
Diameter Tolerance +/- 0.15mm

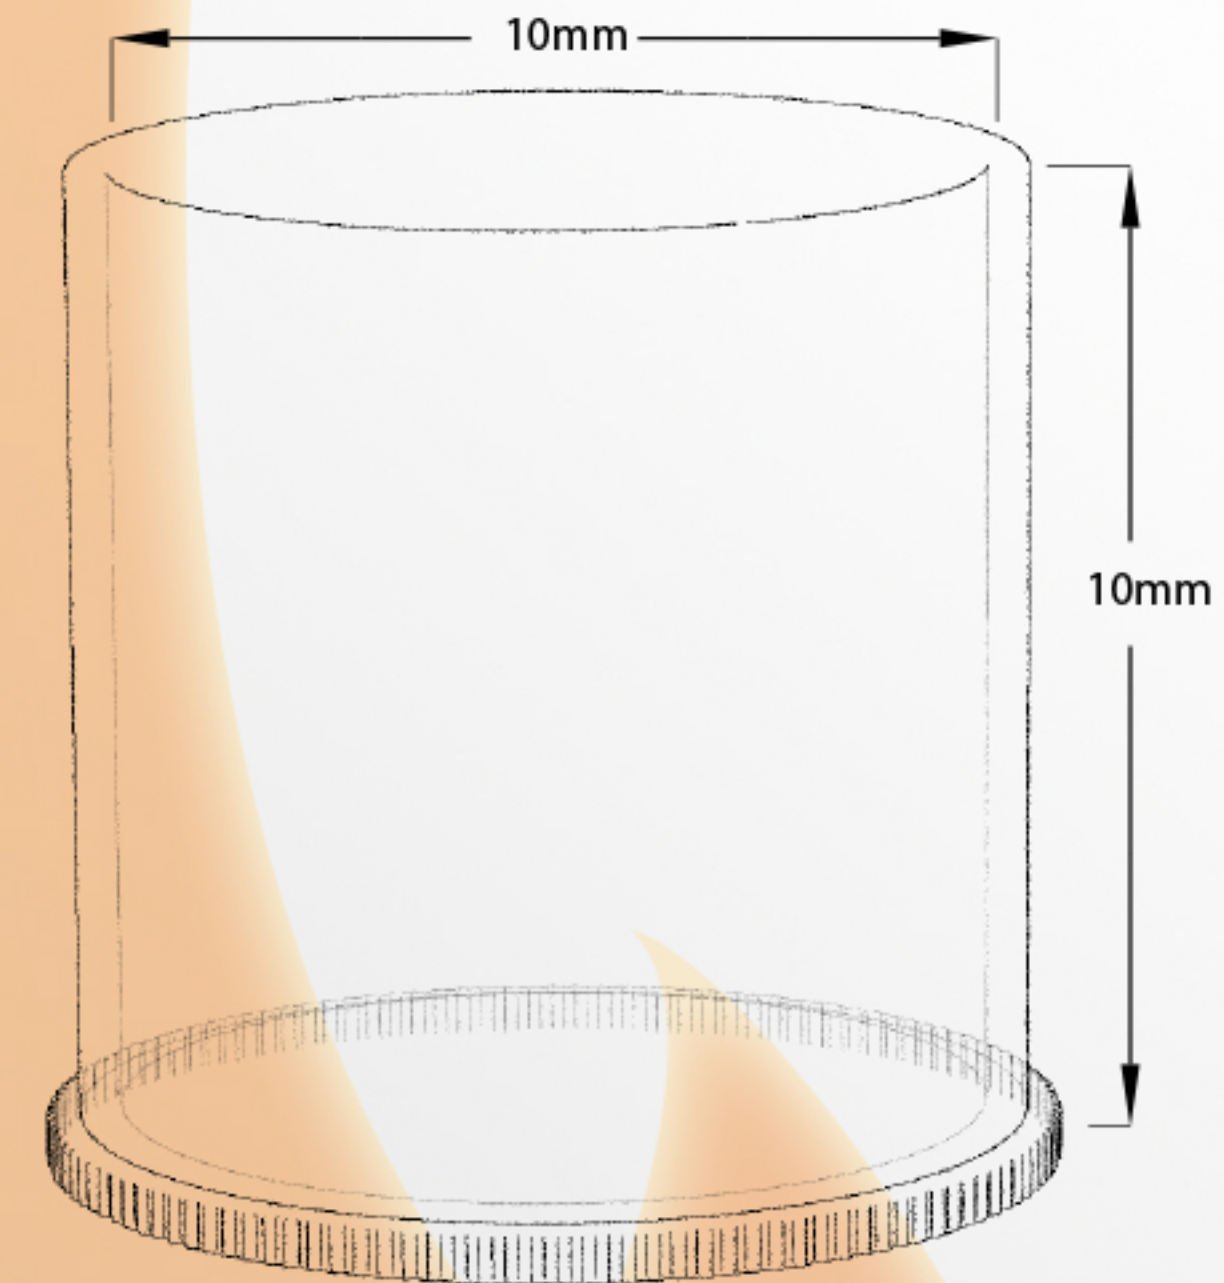

RAW MATERIAL DATA

Low Density Polyethylene (LLDPE)

Tensile Strength - 0.20 - 0.40 N/mm²
Notched Impact Strength -
No Break Kj/m²
Thermal Coefficient of expansion -
100 - 220 x 10⁻⁶
Max Cont Use Temp - 65°C
Density - 0.915 - 0.930 g/cm³
Flexural Modulus - 0.35 GPa
Strain at Yield - 20%
Flammability UL94 - HB
HDT at 0.45MPa - 45°C
HDT at 1.80 MPa - 37°C

Fire Suppression Limited
Unit 11, Eldonwall Trading Estate,
St.Phillips, Bristol, BS4 3QQ

Tel: 0845-127-9915
Fax: 0845-127-9959
sales@firesuppression.co.uk